


PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

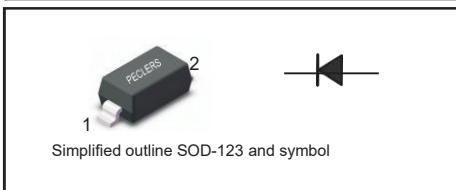





Absolute Maximum Ratings at 25 °C

Parameter	Symbols	BAV19W	BAV20W	BAV21W	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	120	200	250	V
Maximum RMS voltage	V_{RMS}	100	150	200	V
Continuous Forward Current	I_F		250		mA
Repetitive Peak Forward Current	I_{FRM}		625		mA
Non-repetitive Peak Forward Surge Current at 1s at 1ms at 1 us	I_{FSM}		1 3 9		A
Total Power Dissipation	P_{tot}		500		mW
Operating and Storage Temperature Range	T_j, T_{stg}		-55 ~ +150		°C

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbols	BAV19W	BAV20W	BAV21W	Units
Reverse Breakdown Voltage at $I_R=100\mu\text{A}$	$V_{(BR)R}$	120	200	250	V
Maximum Forward Voltage at 100 mA at 200 mA	V_F		1.00 1.25		V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_a = 25^\circ\text{C}$ $T_a = 150^\circ\text{C}$	I_R		0.1 100		μA
Typical Junction Capacitance at $V_R=4\text{V}$, $f=1\text{MHz}$	C_J		5		pF
Maximum Reverse Recovery Time ⁽¹⁾	t_{rr}		50		ns


(1) Measured with $I_F = 0.5 \text{ A}$, $I_R = 1 \text{ A}$, $I_{rr} = 0.25 \text{ A}$

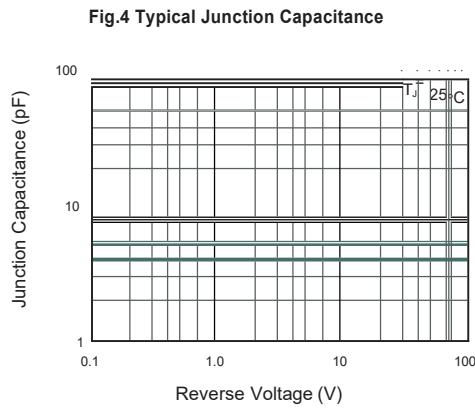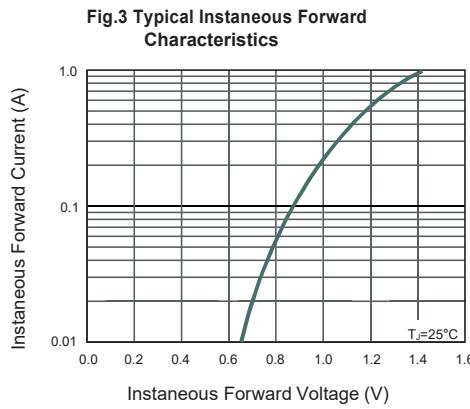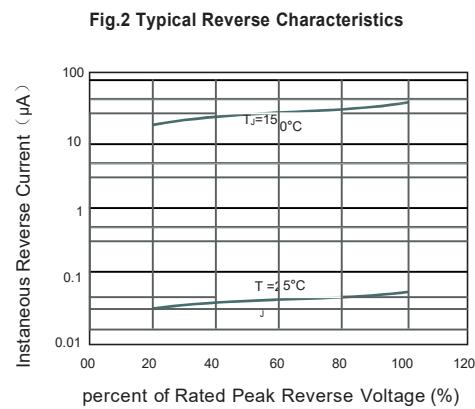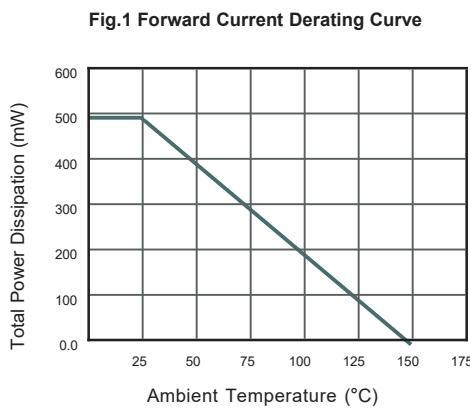

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads


SOD-123

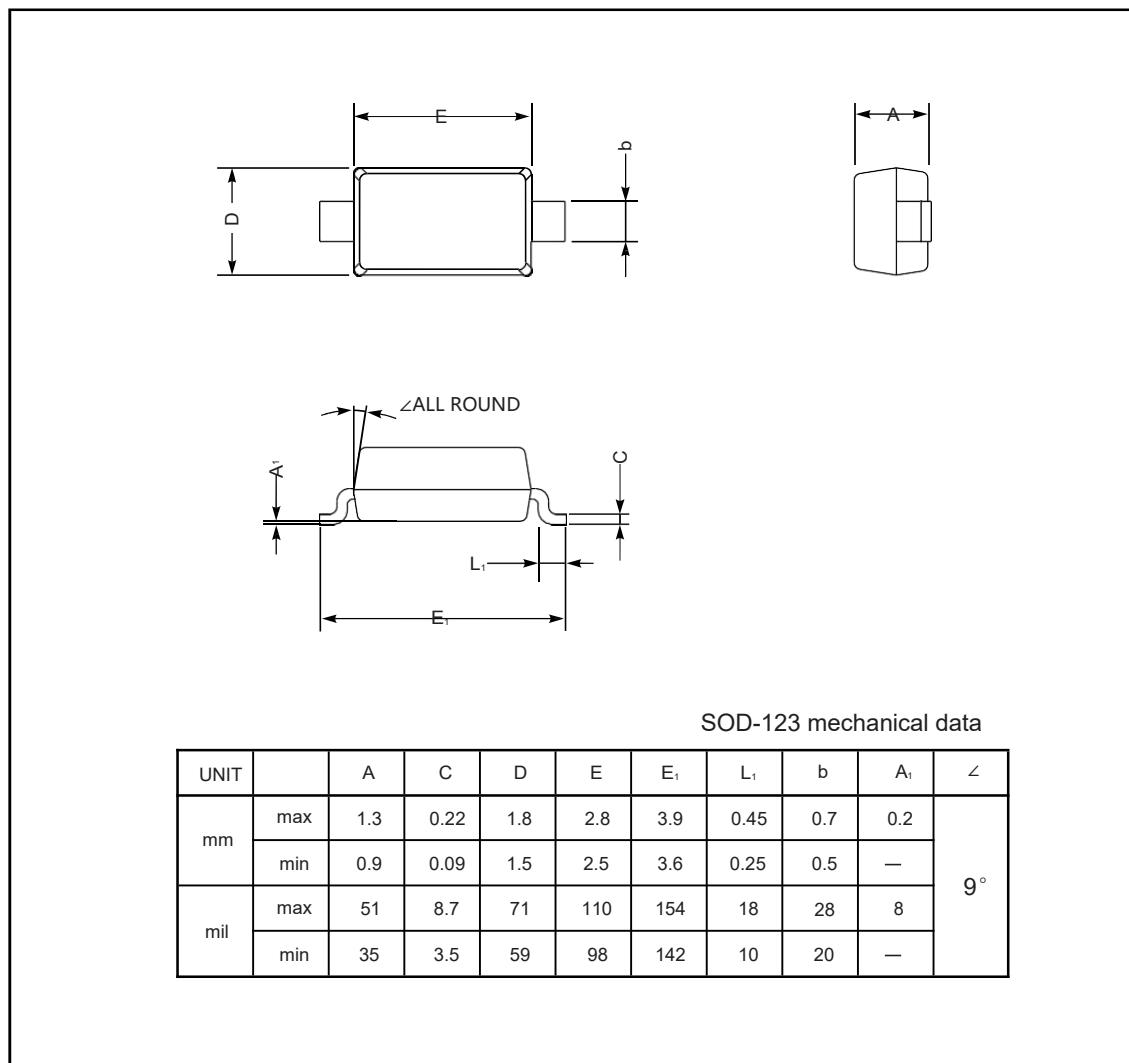

SOD-123 mechanical data

UNIT		A	C	D	E	E ₁	L ₁	b	A ₁	α
mm	max	1.3	0.22	1.8	2.8	3.9	0.45	0.7	0.2	9°
	min	0.9	0.09	1.5	2.5	3.6	0.25	0.5	—	
mil	max	51	8.7	71	110	154	18	28	8	9°
	min	35	3.5	59	98	142	10	20	—	

The recommended mounting pad size

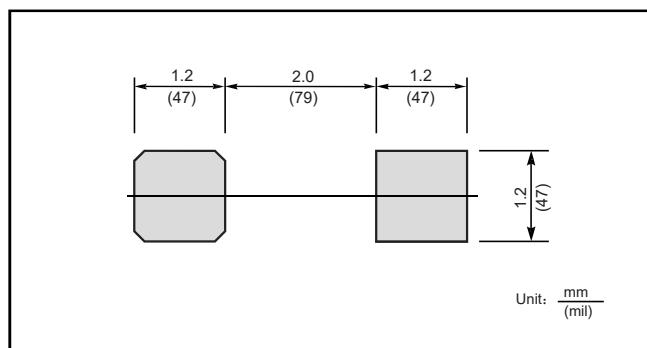

Marking

Type number	Marking code
BAV19W	A8
BAV20W	T2
BAV21W	T3