


REVERSE VOLTAGE: 50 to 1000 VOLTS  
FORWARD CURRENT: 2.0 AMPERE

FEATURES

- Surge overload rating: 60 amperes peak
- Ideal for printed circuit board
- Plastic material has Underwriters Laboratory Flammability Classification 94V-0
- Reliable low cost construction utilizing molded plastic technique

MECHANICAL DATA

Case: Molded plastic, KBP  
Epoxy: UL 94V-O rate flame retardant  
Terminals: Leads solderable per MIL-STD-202, method 208 guaranteed  
Mounting position: Any  
Weight: 0.057ounce, 1.62gram

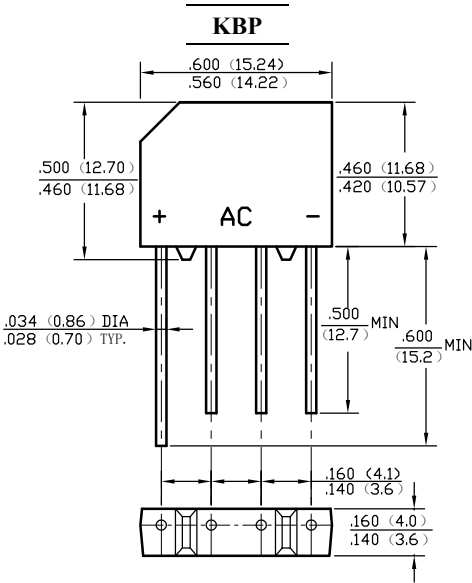

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

	Symbols	RS201	RS202	RS203	RS204	RS205	RS206	RS207	Units
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at T <sub>A</sub> =50°C	I <sub>(AV)</sub>	2.0							Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	50							Amp
Maximum Forward Voltage at 2.0A DC and 25°C	V <sub>F</sub>	1.1							Volts
Maximum Reverse Current at T <sub>A</sub> =25°C at Rated DC Blocking Voltage T <sub>A</sub> =100°C	I <sub>R</sub>	10.0 500							uAmp
Typical Junction Capacitance (Note 1)	C <sub>J</sub>	25							pF
Typical Thermal Resistance (Note 2)	R <sub>θJA</sub>	30							°C/W
Typical Thermal Resistance (Note 2)	R <sub>θJL</sub>	11							°C/W
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150							°C

NOTES:

- 1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
- 2- Thermal Resistance Junction to Ambient and from junction to lead at 0.375"(9.5mm) lead length P.C.B. Mounted.

RATINGS AND CHARACTERISTIC CURVES

FIG.1-MAXIMUN NON-REPETITIVE FORWARD SURGE CURRENT

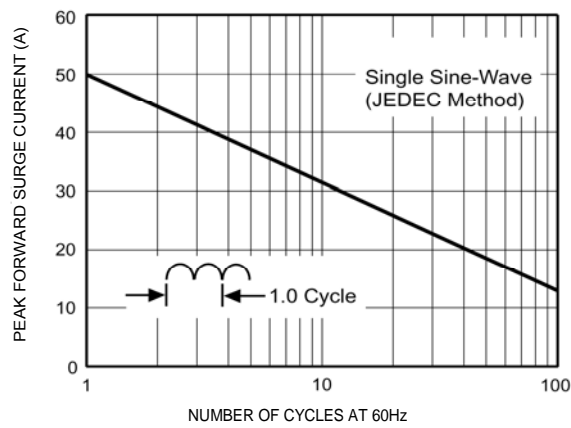


FIG.2- MAXIMUM FORWARD CURRENT DERATING CURVE

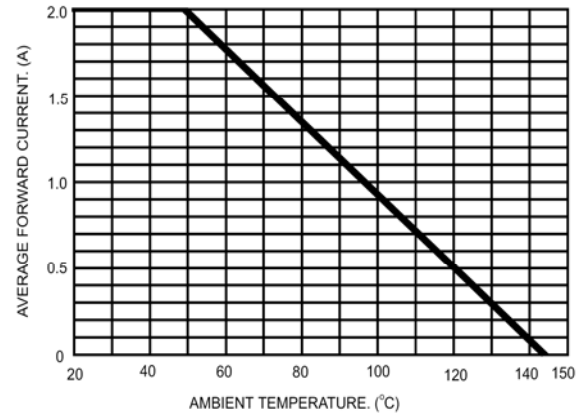


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

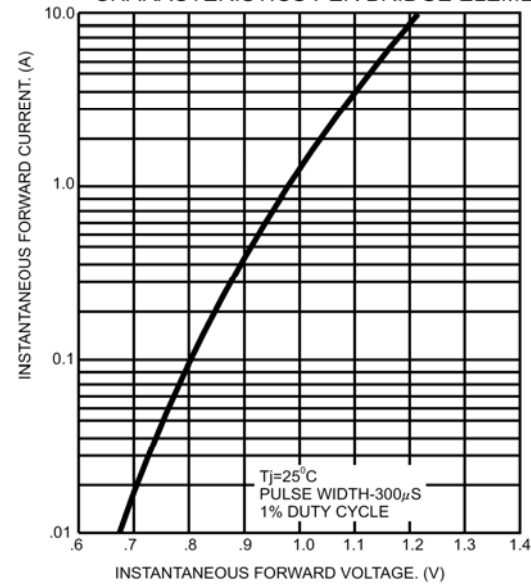


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

