

Surface Mount Schottky Rectifiers

Reverse Voltage - 20 to 200V

Forward Current - 1.0A


Features

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

MECHANICAL DATA

- Case: SOD-123FL
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 15mg 0.00048oz

SOD-123FL

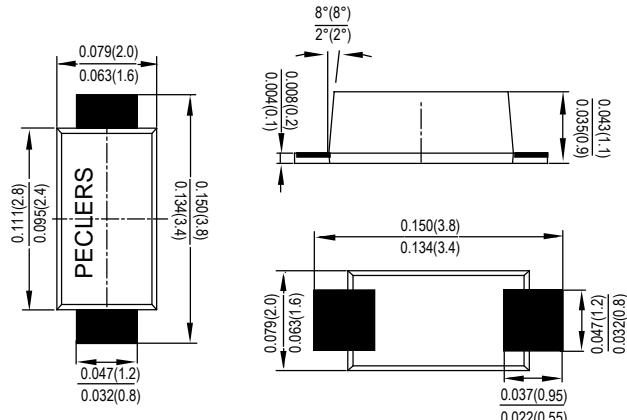

Dimensions in inches and (millimeters)

Absolute Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %;

| Parameter | Symbols | SS12F | SS14F | SS16F | SS18F | SS110F | SS112F | SS115F | SS120F | Units |
|---|--------------------|-------|-------|-------|------------|--------|--------|--------|--------|---------|
| Maximum Repetitive Peak Reverse Voltage | V _{RRM} | 20 | 40 | 60 | 80 | 100 | 120 | 150 | 200 | V |
| Maximum RMS voltage | V _{RMS} | 14 | 28 | 42 | 56 | 70 | 84 | 105 | 140 | V |
| Maximum DC Blocking Voltage | V _{DC} | 20 | 40 | 60 | 80 | 100 | 120 | 150 | 200 | V |
| Maximum Average Forward Rectified Current | I _{F(AV)} | | | | | | 1.0 | | | A |
| Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method) | I _{FSM} | | | | 40 | | | 30 | | A |
| Max Instantaneous Forward Voltage at 5 A | V _F | | 0.55 | | 0.70 | | 0.85 | | 0.95 | |
| Maximum DC Reverse Current T _a = 25°C at Rated DC Reverse Voltage T _a = 100°C | I _R | | | 0.3 | | 0.2 | | 0.1 | | V mA |
| Typical Junction Capacitance ¹⁾ | C _j | 110 | | | | 80 | | | | pF |
| Typical Thermal Resistance ²⁾ | R _{θJA} | | | | 115 | | | | | °C/W |
| Operating Junction Temperature Range | T _j | | | | -55 ~ +125 | | | | | °C |
| Storage Temperature Range | T _{stg} | | | | -55 ~ +150 | | | | | °C |

1) Measured at 1MHz and applied reverse voltage of 4 V D.C.

2) P.C.B. mounted with 0.2 X 0.2" (5 X 5 mm) copper pad areas.

Surface Mount Schottky Rectifiers

Characteristic Curves ($T = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

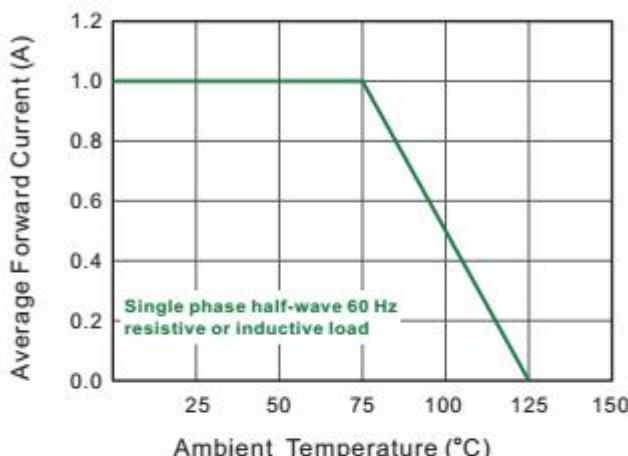


Fig.2 Typical Reverse Characteristics

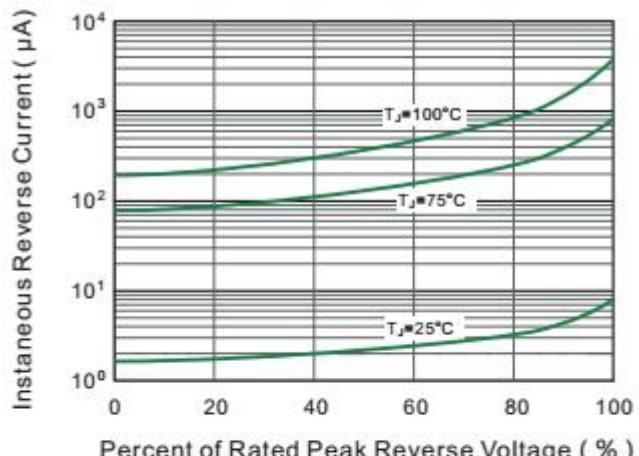


Fig.3 Typical Forward Characteristic

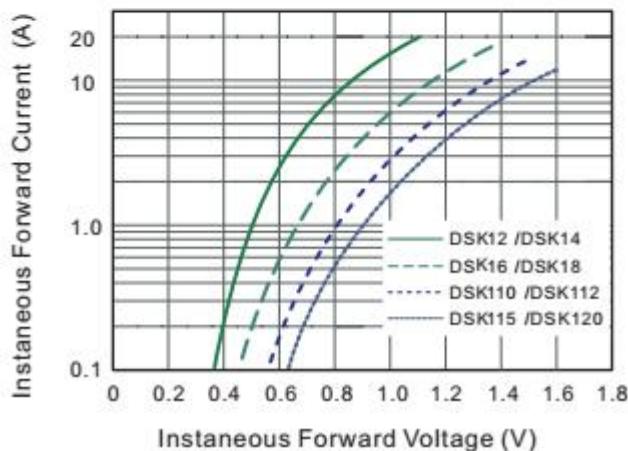


Fig.4 Typical Junction Capacitance

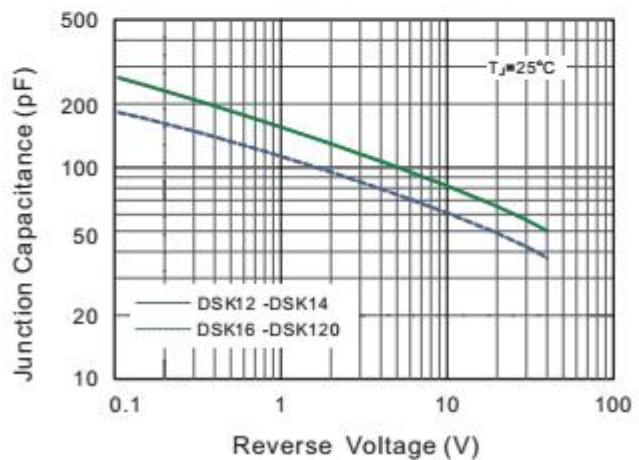


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current



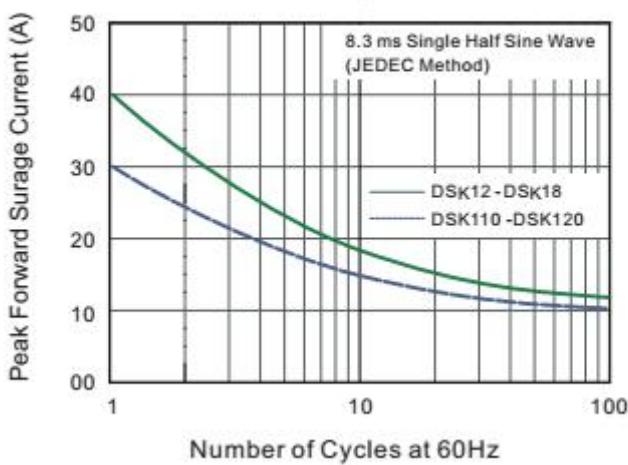


Fig.6- Typical Transient Thermal Impedance

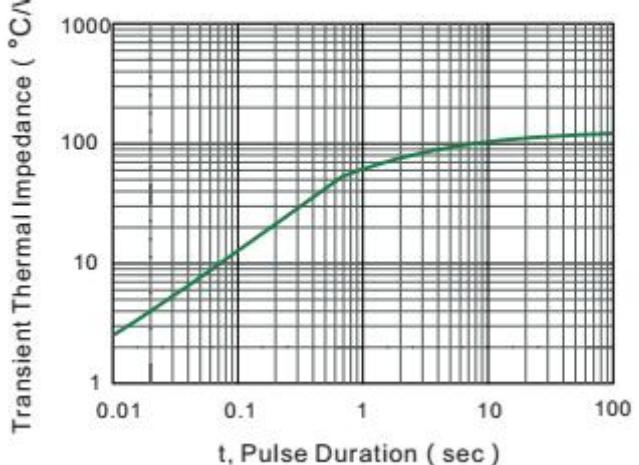

Surface Mount Schottky Rectifiers

The recommended mounting pad size

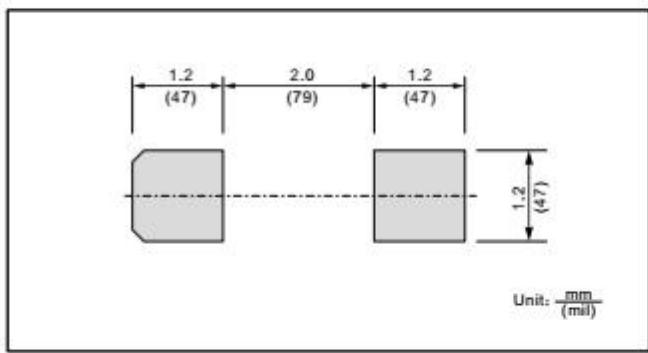

Marking

| Type number | Marking code |
|-------------|--------------|
| DSK12 | SS12 |
| DSK14 | SS14 |
| DSK16 | SS16 |
| DSK18 | SS18 |
| DSK110 | SS110 |
| DSK112 | SS112 |
| DSK115 | SS115 |
| DSK120 | SS120 |